

GTC505m

Engine Ignition Analyzer

Quick, powerful and easy to use


- ▶ Plug the appropriate sensor pick-up into the flexible probe or extension cable
- ▶ Select 2-stroke, 4-stroke or waste spark
- ▶ Select the measurement type and display format
- ▶ Place the coil on plug sensor on top of the ignition module, or the spark plug wire sensor, or clip-on sensor over the spark plug wire
- ▶ The GTC505 will automatically detect and adjust all parameters to provide accurate measurements and clear graphs


Displays and measures

- ▶ Waveforms in real time
- ▶ Spark plug peak voltage
- ▶ Spark burn (firing) time
- ▶ Coil primary current ramp time (COP and CNP)
- ▶ Dwell time (systems with spark plug wire)
- ▶ Engine RPM
- ▶ Maximum and minimum readings

Useful for troubleshooting

- ▶ Non-starts
- ▶ Misfires
- ▶ Intermittent problems
- ▶ Primary and secondary coil circuit faults
- ▶ Fouled or damaged spark plugs
- ▶ Damaged spark plug wires

 Product designed and manufactured in Canada

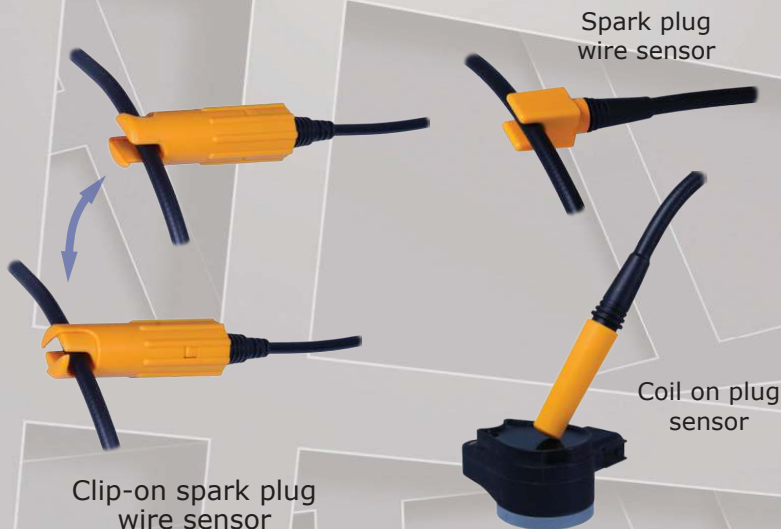

Multiple sensors and hook-up options

- ▶ All specially designed for use with the GTC505
- ▶ 2 m (74") shielded coaxial cable with BNC and sensor connector
- ▶ 30 cm (12") shielded flexible gooseneck with BNC and sensor connector
- ▶ Cable and flexible gooseneck can be use with any sensor
- ▶ Electrically shielded clip-on and spark plug wire sensors fit up to 8 mm diameter wires
- ▶ Active coil on plug (COP) sensor for optimal signal detection and rejection of interference from other ignition modules
- ▶ Automatic detection and configuration of the sensors

Technical specifications

- ▶ **Display:** 3.5" color TFT (320x240 pixels)
- ▶ **Flexible probe:** 30 cm (12") long coaxial gooseneck with BNC and sensor connector
- ▶ **Extension cable:** 2 m (74") (30 cm) coaxial cable with BNC and sensor connector
- ▶ **Coil on plug sensor:** Active type, 14 mm x 52 mm
- ▶ **Spark plug wire sensor:** Shielded capacitive type, 35x13x13 mm, with 8.5 mm opening
- ▶ **Clip-on spark plug wire sensor:** Shielded capacitive type, 24x75 mm, with 8.5 mm opening
- ▶ **Power source:** Rechargeable LiFePO4 battery
- ▶ **Battery life:** 6 hrs of continuous operation
- ▶ **Power saving:** Automatic power off
- ▶ **Physical dimensions:** 6.5"(H) x 4.9"(W) x 1.4"(D) or 165 mm x 124 mm x 36 mm (without probe or cable)
- ▶ **Weight:** 14.8 oz or 420 g (without probe or cable)

RPM measurement

- ▶ Range: 120 to 19,999 RPM
- ▶ Resolution: 1 RPM
- ▶ Accuracy: $\pm 0.5\% + 1$ LSD

Spark (peak) voltage

- ▶ Range: 0 to 50 kV
- ▶ Resolution: 0.1 kV
- ▶ Repetitivity: ± 0.2 kV

Spark burn (firing) time

- ▶ Range: 0 to 10.0 ms
- ▶ Resolution: 0.1 ms
- ▶ Accuracy: ± 0.1 ms + 1 LSD

Ignition primary current ramp time (COP mode)


- ▶ Range: 0 to 10.0 ms
- ▶ Resolution: 0.1 ms
- ▶ Accuracy: ± 0.1 ms + 1 LSD

Dwell time (spark plug wire)

- ▶ Range: 0 to 10.0 ms
- ▶ Resolution: 0.1 ms
- ▶ Accuracy: ± 0.1 ms + 1 LSD

GTC505m set includes:


- ▶ GTC505
- ▶ Flexible probe
- ▶ Extension cable
- ▶ Coil on plug (COP) sensor
- ▶ Spark plug wire (SPW) shielded capacitive sensor
- ▶ Clip-on spark plug wire shielded capacitive sensor
- ▶ USB micro cable and AC charger adapter
- ▶ Protective rubber holster
- ▶ Hard carrying/storage case
- ▶ User's manual
- ▶ 1-year parts and labor warranty

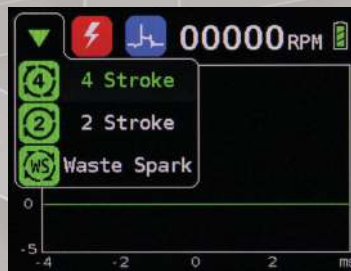

Works on 2-stroke, 4-stroke, and waste spark ignition system engines.




Displays secondary ignition waveforms.

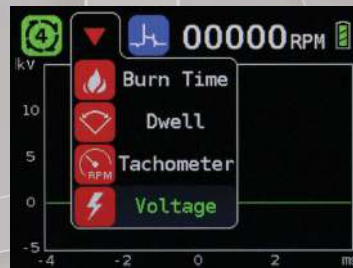

Measures and displays spark burn (firing) time, dwell time, current ramp time, RPM, and spark plug peak voltage.



Compare sets of values (minimum, average and maximum readings) between several cylinders.

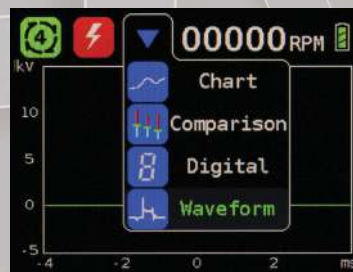

Every measurement can be displayed in compare mode, chart mode, analog gauge / digital readout or waveforms.



Analog gauge and digital readout with maximum and minimum.



6+ hours of working time when starting with a fully charged battery.



Unique chart mode makes easier to detect intermittent or infrequent failures and misfires.

Other GTC products



General Technologies Corp. #121-7350 72nd Street Delta, BC V4G 1H9 - Canada
Toll Free: 800-440-5582 / Tel: 604-952-6699 / Fax: 604-952-6690 www.gtc.ca / info@gtc.ca

"GTC" is a registered trademark of General Technologies Corp. © 2018 General Technologies Corp.
27/02/18

GTC
WWW.GTC.CA
Printed in Canada